

The Ascent A105 has a Kodak full frame color sensor with high resolution and small pixels. Low noise and large field-of-view are ideal for OEMs, fundus imaging, and astrophotography.

- Astrophotography
- Fundus imaging

- 3970 x 2546 array, 6.8 x 6.8 micron pixels
- 32 Mbyte SDRAM image buffer
- Programmable dual channel 16-bit digitization speeds up to 10 Mpixels/sec per channel
- USB 2.0 interface: no plug in cards or external controllers
- Programmable, intelligent cooling to 30°C below ambient
- Binning up to 4 Horizontal x CCD height
- Subarray readout and fast sequencing modes
- Precision time delayed integration (TDI) and kinetics mode readout
- Programmable offset and gain
- External triggering and strobe controls
- ActiveX drivers included with every system
- Field upgradeable firmware
- BK7 windows (optional fused silica)
- Optional internal vane or external electromechanical shutter
- Optional Nikon F-mount or 2" slip fit adapter
- Single 6V supply with input voltage protection system
- Compact enclosure: 23 oz. (0.65 kg)
- Programmable status indicators

CCD SPECIFICATIONS

CCD	Kodak KAF-10500 (color)
Array Size (pixels)	3970 x 2546
Pixel Size	6.8 x 6.8 microns
Imaging Area	27 x 18 mm (485 mm ²)
Imaging Diagonal	32.4 mm
Video Imager Size	2.0"
Linear Full Well (typical)	60K electrons
Dynamic Range	71 dB
QE at 400 nm (RGB)	2.5%, 2.2%, 12%
Peak QE (RGB)	17%, 40%, 32%
Anti-blooming	1000X

For complete CCD specifications, including cosmetic grading, see data sheet from manufacturer.

©2007 Apogee Instruments Inc. Ascent is a trademark of Apogee Instruments Inc.
Specifications subject to change without notice.

Imaging Area of CCD





ASCENT


Apogee Instruments Inc.

ASCENT A105 Camera System Performance



PC Interface	USB 2.0
USB2 Cable	Std.: 5m. Extensions: 5 meters between hubs; 5 hubs maximum (max. total of 30m) Wide variety of extenders available, including fiber optics to 10 km.
Digital Resolution	Dual channel 16 bit at up to 10 Mpixels/sec per channel
System Noise (typical)	15 e ⁻ RMS at 1.5 MHz
Pixel Binning	Not applicable (color matrix CCD)
Exposure Time	Minimum 100 milliseconds using vane shutter; max.183 minutes
Image Sequencing	1 to 65535 image sequences under software control
Frame Sizes	Full frame, subframe, focus mode
Cooling (typical)	Thermoelectric cooler. Maximum forced air cooling 30°C below ambient temperature.
Dark Current (typical)	1.5 e ⁻ /pixel/sec (-10°C)
Temperature Stability	± 0.1°C
Camera Head Size	Aluminum. 3.2" x 5.7" x 1.3" (8.1 x 14.5 x 3.3 cm) Weight: 1.4 lb. (0.65 kg)
Mounting	1.5" x 2.5" bolt pattern, 6-32 thread. Optional Nikon F-mount or 2" slip-fit adapters.
Back Focal Distance	Standard: 0.32" (0.81 cm). [optical]
Operating Environment	-30°C to 35°C. Relative humidity: 10 to 90% non-condensing.
Op.Sys.Support	Windows, Linux, Mac OSX
Power	20W maximum power with internal shutter open and cooling maximum. AC/DC "brick" supply with int'l AC input plug (100-240V, 50-60 Hz). Alternate 6V input from user's source.
Shutter	Standard: Electromechanical vane shutter. Optional external electromechanical shutter.
Remote Triggering	LVTTL input allows exposure to start within 25 microseconds of rising edge of trigger

CCD SENSITIVITY

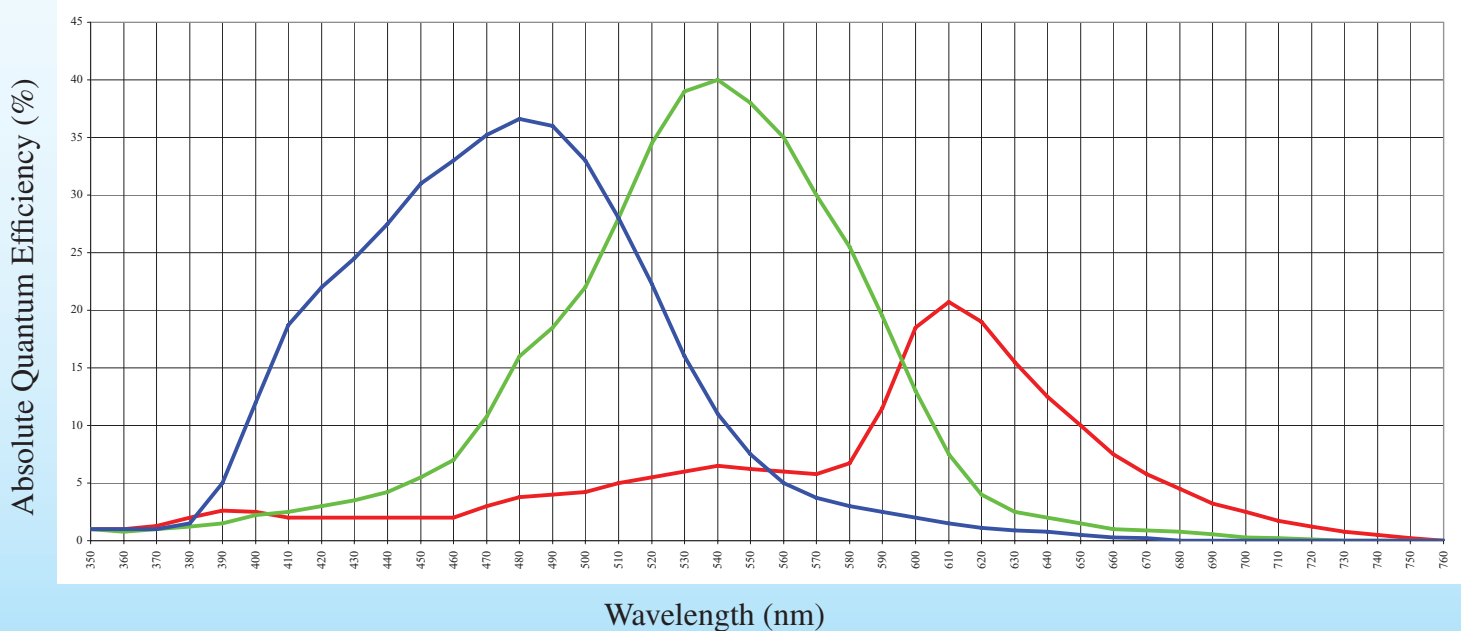

©2007 Apogee Instruments Inc. Ascent is a trademark of Apogee Instruments Inc. Specifications subject to change without notice.